



REMEMCO

MANUFACTURING

CLAMPS

COUPLINGS

PUMPS

2804 W 40th St

Tulsa, OK 74107

t. (800) 346-6310

f. (918) 445-7717

www.youngenergyproducts.com



YOUNG

ENERGY PRODUCTS



TABLE OF CONTENTS

PIPE REPAIR CLAMPS

EZ Pipe Repair Clamps	1-2
EZ Multi Panel Pipe Repair Clamps	3
FC Full Circumference Pipe Repair Clamp	4-5
FC Multi-Panel Full Circumference Pipe Repair Clamps	6-7
FC Full Circumference Interlocking Lug Pipe Repair Clamp	8-9
FC Full Circumference Multi-Panel Interlocking Lug Pipe Repair Clamps	10-11
EZ Collar Leak Clamps	12
Full Circle Collar Leak Clamps	13

COUPLINGS

Plastic Coated Steel Sleeve Couplings	14
Galvanized Steel Compression Couplings	15

CHEMICAL INJECTORS

Flow Line Check Valves, Stainless Steel & Brass	16
---	----

POLISHED ROD LUBRICATORS

17

VANE METER REPAIR KITS

18

TOGGLE BAR TANK PATCH

19

TOGGLE WING TANK PATCH

19

TAPERED SCREW LEAK REPAIR

20

TILE PROBES

20

TERMS AND WARRANTY

21

PIPE OD REFERENCE CHART

22

EZ Single Panel

PIPE REPAIR CLAMPS



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTENT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- FLAT NEOPRENE GASKETS (WAFFLE AVAILABLE UPON REQUEST)
- ASTM A536 DUCTILE IRON LUGS
- WORKING TEMPERATURE RANGE: -50° F TO 210° F

NOMINAL PIPE SIZE (IN)	PIPE OD (IN)	WIDTH (IN)	WEIGHT (LBS)	CARTON QUANTITY	ORDER #
1/2"	0.84	3	0.6	12	EZ-1/2X3
		6	1.2	6	EZ-1/2X6
		9	1.8		EZ-1/2X9
		12	2.4		EZ-1/2X12
3/4"	1.05	3	0.1	12	EZ-3/4X3
		6	1.4	6	EZ-3/4X6
		9	2.1		EZ-3/4X9
		12	2.8		EZ-3/4X12
1"	1.32	3	0.8	12	EZ-1X3
		6	1.6	6	EZ-1X6
		9	2.4		EZ-1X9
		12	3.2		EZ-1X12
1 1/4"	1.66	3	1.0	6	EZ-1.25X3
		6	2.0	3	EZ-1.25X6
		9	3.0		EZ-1.25X9
		12	4.0		EZ-1.25X12
1 1/2"	1.90	3	1.1	6	EZ-1.5X3
		6	2.2	3	EZ-1.5X6
		9	3.3		EZ-1.5X9
		12	4.4		EZ-1.5X12
2"	2.38	3	1.2	4	EZ-2X3
		6	2.4	2	EZ-2X6
		9	3.6		EZ-2X9
		12	4.8		EZ-2X12
2 1/2"	2.88	3	1.3	4	EZ-2.5X3
		6	2.6	2	EZ-2.5X6
		9	3.9		EZ-2.5X9
		12	4.2		EZ-2.5X12
3"	3.50	3	1.3	4	EZ-3X3
		6	2.6	2	EZ-3X6
		9	3.9		EZ-3X9
		12	4.2		EZ-3X12

EZ Single Panel (cont.)

PIPE REPAIR CLAMPS

NOMINAL PIPE SIZE (IN)	PIPE OD (IN)	WIDTH (IN)	WEIGHT (LBS)	CARTON QUANTITY	ORDER #
4" OD	4.00	3	1.4	4	EZ-4ODX3
		6	2.8	2	EZ-4ODX6
		9	4.2		EZ-4ODX9
		12	5.6		EZ-4ODX12
4"	4.50	3	1.5	4	EZ-4X3
		6	3.0	2	EZ-4X6
		9	4.5		EZ-4X9
		12	6.0		EZ-4X12
5"	5.56	3	1.6	2	EZ-5X3
		6	3.2	1	EZ-5X6
		9	4.8		EZ-5X9
		12	6.4		EZ-5X12
6"	6.63	3	1.8	2	EZ-6X3
		6	3.6	1	EZ-6X6
		9	5.4		EZ-6X9
		12	7.2		EZ-6X12
7" OD	7.00	3	1.9		EZ-7X3
		6	3.8		EZ-7X6
		9	5.7		EZ-7X9
		12	7.6		EZ-7X12
8"	8.63	3	2.0		EZ-8X3
		6	4.0		EZ-8X6
		9	6.0		EZ-8X9
		12	8.0		EZ-8X12
10"	10.75	3	2.3		EZ-10X3
		6	4.6		EZ-10X6
		9	6.9		EZ-10X9
		12	9.2		EZ-10X12
12"	12.75	3	2.5		EZ-12X3
		6	5.0		EZ-12X6
		9	7.5		EZ-12X9
		12	10.0		EZ-12X12

REPLACEMENT PARTS

PART	ORDER #
Bolt, Nut and Washer Set (1/2" - 1 1/2" Clamps)	EZ-CBNW-3/8
Bolt, Nut and Washer Set (2" - 4" Clamps)	EZ-CBNW-7/16
Bolt, Nut and Washer Set (5" and larger Clamps)	EZ-CBNW-5/8

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.1717
www.youngenergyproducts.com

EZ Multi-Panel

DOUBLE PANEL PIPE REPAIR CLAMPS



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- FLAT NEOPRENE GASKETS (WAFFLE AVAILABLE UPON REQUEST)
- ASTM A536 DUCTILE IRON LUGS
- WORKING TEMPERATURE RANGE: -50° F TO 210° F

NOMINAL PIPE SIZE (IN)	PIPE OD (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #
10"	10.75	3	2.8	EZM-10X3
		6	5.6	EZM-10X6
		9	8.4	EZM-10X9
		12	11.2	EZM-10X12
12"	12.75	3	3.0	EZM-12X3
		6	6.0	EZM-12X6
		9	9.0	EZM-12X9
		12	12.0	EZM-12X12
14"	14.00	3	3.2	EZM-14X3
		6	6.4	EZM-14X6
		9	9.6	EZM-14X9
		12	12.8	EZM-14X12
16"	16.00	3	3.8	EZM-16X3
		6	7.6	EZM-16X6
		9	11.4	EZM-16X9
		12	15.2	EZM-16X12
18"	18.00	3	4.0	EZM-18X3
		6	8.0	EZM-18X6
		9	12.0	EZM-18X9
		12	16.0	EZM-18X12
20"	20.00	3	4.3	EZM-20X3
		6	8.6	EZM-20X6
		9	12.9	EZM-20X9
		12	17.2	EZM-20X12
22"	22.00	3	4.7	EZM-22X3
		6	9.4	EZM-22X6
		9	14.1	EZM-22X9
		12	18.8	EZM-22X12
24"	24.00	3	5.2	EZM-24X3
		6	10.4	EZM-24X6
		9	15.6	EZM-24X9
		12	20.8	EZM-24X12

SPECIAL SIZES AVAILABLE UPON REQUEST



**FOR MAXIMUM SEALING POWER TORQUE BOLTS
EQUALLY ON BOTH SIDES OF THE CLAMP**

2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

Full Circle

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- NBR TAPERED & MOLDED GASKETS WITH RAISED RIB WAFFLE DESIGN
- ASTM A395 DUCTILE IRON LUGS
- WORKING TEMPERATURE RANGE: -40° F TO 150° F

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
2"	2A 2.05 - 2.24 2B 2.35 - 2.63 2C 2.45 - 2.65	6	6	FC-2X6
		8	8	FC-2X8
		12	13	FC-2X12
		16	15	FC-2X16
		20	20	FC-2X20
		24	23	FC-2X24
2 1/2"	2 1/2A 2.70 - 3.00	6	7	FC-2.5X6
		8	9	FC-2.5X8
		12	12	FC-2.5X12
		16	16	FC-2.5X16
		20	21	FC-2.5X20
		24	25	FC-2.5X24
3"	3A 2.97 - 3.25 3B 3.40 - 3.70 3C 3.73 - 4.00 3D 3.96 - 4.25 3E 4.25 - 4.60	6	7	FC-3X6
		8	9	FC-3X8
		12	13	FC-3X12
		16	17	FC-3X16
		20	21	FC-3X20
		24	25	FC-3X24
4"	4A 4.40 - 4.70 4B 4.74 - 5.14 4C 4.95 - 5.35 4D 5.22 - 5.62	6	7	FC-4X6
		8	9	FC-4X8
		12	14	FC-4X12
		16	18	FC-4X16
		20	22	FC-4X20
		24	27	FC-4X24
6"	6A 5.95 - 6.35 6B 6.50 - 6.90 6C 6.84 - 7.24 6D 7.05 - 7.45 6E 7.45 - 7.85	6	9	FC-6X6
		8	11	FC-6X8
		12	16	FC-6X12
		16	20	FC-6X16
		20	25	FC-6X20
		24	30	FC-6X24

*PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 2BX12 = FC-2X12-B

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.7717
www.youngenergyproducts.com

Full Circle (cont.)

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
8"		6	9	FC-8X6
	8A 7.95 - 8.35	8	11	FC-8X8
	8B 8.54 - 8.94	12	17	FC-8X12
	8C 8.99 - 9.39	16	23	FC-8X16
	8D 8.27 - 9.67	20	30	FC-8X20
		24	35	FC-8X24
10"		6	9	FC-10X6
	10A 9.70 - 10.10	8	12	FC-10X8
	10B 10.64 - 11.04	12	18	FC-10X12
	10C 11.04 - 11.44	16	24	FC-10X16
	10D 11.34 - 11.74	20	30	FC-10X20
	10E 11.75 - 12.15	24	36	FC-10X24
12"		6	10	FC-12X6
	12A 12.00 - 12.40	8	13	FC-12X8
	12B 12.62 - 13.02	12	20	FC-12X12
	12C 13.10 - 13.50	16	26	FC-12X16
	12D 13.40 - 13.80	20	33	FC-12X20
		24	40	FC-12X24
14"		6	12	FC-14X6
	14A 13.92 - 14.20	8	16	FC-14X8
	14B 14.15 - 14.45	12	24	FC-14X12
	14C 14.40 - 14.70	16	32	FC-14X16
	14D 15.30 - 15.65	20	39	FC-14X20
		24	48	FC-14X24

*PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 8BX12 = FC-8X12-B

REPLACEMENT PARTS (FC & FCM)

PART	ORDER #
Bolt, Nut and Washer Set	FC-CBNW-5/8

*PLEASE SPECIFY CLAMP RANGE WHEN ORDERING.

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.7717
www.youngenergyproducts.com

Full Circle Multi-Panel

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS MULTI-PANEL



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- NBR TAPERED & MOLDED GASKETS WITH RAISED RIB WAFFLE DESIGN
- ASTM A395 DUCTILE IRON LUGS

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
4"	4A 4.45 - 4.90 4B 4.80 - 5.10 4C 5.30 - 5.70	6	12	FCM-4X6
		8	16	FCM-4X8
		12	24	FCM-4X12
		16	32	FCM-4X16
		20	40	FCM-4X20
		24	48	FCM-4X24
6"	6A 6.00 - 6.30 6B 6.50 - 6.80 6C 6.85 - 7.20 6D 7.10 - 7.45	6	13	FCM-6X6
		8	17	FCM-6X8
		12	25	FCM-6X12
		16	33	FCM-6X16
		20	41	FCM-6X20
		24	49	FCM-6X24
8"	8A 8.00 - 8.40 8B 8.60 - 8.90 8C 9.05 - 8.45 8D 9.30 - 9.70	6	13	FCM-8X6
		8	18	FCM-8X8
		12	25	FCM-8X12
		16	33	FCM-8X16
		20	41	FCM-8X20
		24	52	FCM-8X24
10"	10A 9.70 - 10.10 10B 10.10 - 10.50 10C 10.70 - 11.10 10D 11.10 - 11.50 10E 11.50 - 11.95 10F 11.80 - 12.00	6	14	FCM-10X6
		8	19	FCM-10X8
		12	27	FCM-10X12
		16	35	FCM-10X16
		20	43	FCM-10X20
		24	55	FCM-10X24

*PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 4BX12 = F4X12B

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.7717
www.youngenergyproducts.com

Full Circle Multi-Panel (CONT.)

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS MULTI-PANEL

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
12"	12B 12.40 - 12.80	6	15	FCM-12X6
		8	22	FCM-12X8
		12	32	FCM-12X12
		16	45	FCM-12X16
		20	58	FCM-12X20
		24	68	FCM-12X24
14"	14A 13.90 - 14.30	6	16	FCM-14X6
		8	22	FCM-14X8
		12	33	FCM-14X12
		16	45	FCM-14X16
		20	59	FCM-14X20
		24	68	FCM-14X24
16"	16A 15.95 - 16.10	6	16	FCM-16X6
		8	23	FCM-16X8
		12	33	FCM-16X12
		16	46	FCM-16X16
		20	59	FCM-16X20
		24	69	FCM-16X24
18"	18A 17.95 - 18.10	6	17	FCM-18X6
		8	23	FCM-18X8
		12	34	FCM-18X12
		16	46	FCM-18X16
		20	60	FCM-18X20
		24	69	FCM-18X24
20"	20A 19.95 - 20.10	6	17	FCM-20X6
		8	24	FCM-20X8
		12	34	FCM-20X12
		16	47	FCM-20X16
		20	60	FCM-20X20
		24	70	FCM-20X24
24"	24A 23.95 - 24.10	6	18	FCM-24X6
		8	24	FCM-24X8
		12	35	FCM-24X12
		16	47	FCM-24X16
		20	61	FCM-24X20
		24	71	FCM-24X24

*PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 4BX12 = FCM-4X12B

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.7717
www.youngenergyproducts.com

Full Circle Interlocking Lug

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS INTERLOCKING LUG



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DCHROMATE-PLATED BOLTS, NUTS, & WASHERS
- NBR TAPERED & MOLDED GASKETS WITH RAISED RIB WAFFLE DESIGN
- ASTM A536 80-55-06 DUCTILE IRON LUGS WITH EQUALLY SUPPORTING, INTERLOCKING FINGERS
- WORKING TEMPERATURE RANGE: -40° F TO 150° F
- THIS CLAMP DESIGN COMBINES THE CONVENIENCE OF THE BOLT CLIP-IN ACTION OF THE PIPE REPAIR CLAMP WITH THE DURABILITY OF THE SINGLE-PANEL COMPLETE CIRCLE PIPE REPAIR CLAMP

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
2"	2A 2.05 - 2.25 2B 2.35 - 2.63 2C 2.45 - 2.65	8	8	ILFC-2X8
		10	10	ILFC-2X10
		12	13	ILFC-2X12
		16	15	ILFC-2X16
		20	20	ILFC-2X20
		24	23	ILFC-2X24
2 1/2"	2 1/2A 2.70 - 3.00	8	9	ILFC-2.5X8
		10	11	ILFC-2.5X10
		12	12	ILFC-2.5X12
		16	16	ILFC-2.5X16
		20	21	ILFC-2.5X20
3"	3A 2.97 - 3.25 3B 3.40 - 3.70 3C 3.73 - 4.00 3D 3.96 - 4.25 3E 4.25 - 4.60	8	9	ILFC-3X8
		10	11	ILFC-3X10
		12	13	ILFC-3X12
		16	17	ILFC-3X16
		20	21	ILFC-3X20
		24	25	ILFC-3X24
4"	4A 4.40 - 4.70 4B 4.74 - 5.14 4C 4.95 - 5.35 4D 5.22 - 5.62	8	9	ILFC-4X8
		10	12	ILFC-4X10
		12	14	ILFC-4X12
		16	18	ILFC-4X16
		20	22	ILFC-4X20
		24	27	ILFC-4X24

* 6" WIDTH AVAILABLE AT SAME PRICE AS 8"

**PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 2BX12 = ILFC-2X1-2B

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.7717
www.youngenergyproducts.com

Full Circle Interlocking Lug (CONT.)

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS INTERLOCKING LUG

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
6"	6A 5.95 - 6.35	8	11	ILFC-6X8
	6B 6.50 - 6.90	10	14	ILFC-6X10
	6C 6.94 - 7.24	12	16	ILFC-6X12
	6D 7.05 - 7.45	16	20	ILFC-6X16
	6E 7.45 - 7.85	20	25	ILFC-6X20
	6E 7.45 - 7.85	24	30	ILFC-6X24
8"	8A 7.95 - 8.35	8	11	ILFC-8X8
	8B 8.54 - 8.94	10	14	ILFC-8X10
	8C 8.99 - 9.39	12	17	ILFC-8X12
	8C 8.99 - 9.39	16	23	ILFC-8X16
	8D 9.27 - 9.67	20	30	ILFC-8X20
	8D 9.27 - 9.67	24	35	ILFC-8X24
10"	10A 9.70 - 1.10	8	12	ILFC-10X8
	10B 10.64 - 11.04	10	15	ILFC-10X10
	10C 11.04 - 11.44	12	18	ILFC-10X12
	10D 11.34 - 11.75	16	23	ILFC-10X16
	10E 11.75 - 12.15	20	30	ILFC-10X20
	10E 11.75 - 12.15	24	36	ILFC-10X24
12"	12A 12.00 - 12.40	8	13	ILFC-12X8
	12B 12.62 - 13.02	10	17	ILFC-12X10
	12C 13.10 - 13.50	12	20	ILFC-12X12
	12C 13.10 - 13.50	16	26	ILFC-12X16
	12D 13.40 - 13.80	20	33	ILFC-12X20
	12D 13.40 - 13.80	24	40	ILFC-12X24
14"	14A 13.82 - 14.20	8	16	ILFC-14X8
	14B 14.15 - 14.45	10	20	ILFC-14X10
	14C 14.40 - 14.70	12	24	ILFC-14X12
	14C 14.40 - 14.70	16	32	ILFC-14X16
	14D 15.30 - 15.65	20	39	ILFC-14X20
	14D 15.30 - 15.65	24	48	ILFC-14X24

* 6" WIDTH AVAILABLE AT SAME PRICE AS 8"

**PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 4BX12 = ILFC-4X12-B

REPLACEMENT PARTS (ILFC & ILFCM)

PART	ORDER #
Bolt, Nut and Washer Set	FC-CBNW-5/8

#PLEASE SPECIFY CLAMP RANGE WHEN ORDERING.

SPECIAL SIZES AVAILABLE UPON REQUEST



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.447.7717
www.youngenergyproducts.com

Full Circle Multi-Panel Interlocking Lug

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS MULTI-PANEL INTERLOCKING LUG



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- NBR TAPERED & MOLDED GASKETS WITH RAISED RIB WAFFLE DESIGN
- ASTM A536 80-55-06 DUCTILE IRON LUGS WITH EQUALLY SUPPORTING, INTERLOCKING FINGERS
- WORKING TEMPERATURE RANGE: -40° F TO 150° F
- THIS CLAMP DESIGN COMBINES THE CONVENIENCE OF THE BOLT CLIP-IN ACTION OF THE REM-1185EZ WITH THE DURABILITY OF THE REM-1186FC

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH (IN)	WEIGHT (LBS)	ORDER #*
4"	4A 4.45 - 4.90 4B 4.80 - 5.10 4C 5.30 - 5.70	8	16	ILFCM-4X8
		10	20	ILFCM-4X10
		12	24	ILFCM-4X12
		16	32	ILFCM-4X16
		20	40	ILFCM-4X20
		24	48	ILFCM-4X24
6"	6A 6.00 - 6.30 6B 6.50 - 6.80 6C 6.85 - 7.20 6D 7.10 - 7.45	8	17	ILFCM-6X8
		10	21	ILFCM-6X10
		12	25	ILFCM-6X12
		16	33	ILFCM-6X16
		20	41	ILFCM-6X20
		24	49	ILFCM-6X24
8"	8A 8.00 - 8.40 8B 8.60 - 8.90 8C 9.05 - 9.45 8D 9.30 - 9.70	8	18	ILFCM-8X8
		10	22	ILFCM-8X10
		12	25	ILFCM-8X12
		16	33	ILFCM-8X16
		20	41	ILFCM-8X20
		24	52	ILFCM-8X24
10"	10A 9.70 - 10.10 10B 10.10 - 10.50 10C 10.70 - 11.10 10D 11.10 - 11.50 10E 11.50 - 11.95 10F 11.80 - 12.00	8	19	ILFCM-10X8
		10	23	ILFCM-10X10
		12	27	ILFCM-10X12
		16	35	ILFCM-10X16
		20	43	ILFCM-10X20
		24	55	ILFCM-10X24

* 6" WIDTH AVAILABLE AT SAME PRICE AS 8"

**PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 2BX12 = ILFCM-2X12-B

SPECIAL SIZES AVAILABLE UPON REQUEST

RE MCO
MANUFACTURING

FOR MAXIMUM SEALING POWER TORQUE BOLTS
EQUALLY ON BOTH SIDES OF THE CLAMP

2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

Full Circle Multi-Panel Interlocking Lug (CONT.)

FULL CIRCUMFERENCE PIPE REPAIR CLAMPS MULTI-PANEL INTERLOCKING LUG

NOMINAL PIPE SIZE (IN)	CLAMP RANGE (IN)	WIDTH* (IN)	WEIGHT (LBS)	ORDER #**
12"	12B 12.40 - 12.80	8	22	ILFCM-12X8
		10	27	ILFCM-12X10
		12	32	ILFCM-12X12
		16	45	ILFCM-12X16
		20	58	ILFCM-12X20
		24	68	ILFCM-12X24
14"	14A 13.90 - 14.30	8	22	ILFCM-14X8
		10	28	ILFCM-14X10
		12	33	ILFCM-14X12
		16	45	ILFCM-14X16
		20	59	ILFCM-14X20
		24	68	ILFCM-14X24
16"	16A 15.95 - 16.10	8	23	ILFCM-16X8
		10	28	ILFCM-16X10
		12	33	ILFCM-16X12
		16	46	ILFCM-16X16
		20	59	ILFCM-16X20
		24	69	ILFCM-16X24
18"	18A 17.95 - 18.10	8	23	ILFCM-18X8
		10	29	ILFCM-18X10
		12	34	ILFCM-18X12
		16	46	ILFCM-18X16
		20	60	ILFCM-18X20
		24	69	ILFCM-18X24
20"	20A 19.95 - 20.10	8	24	ILFCM-20X8
		10	29	ILFCM-20X10
		12	34	ILFCM-20X12
		16	47	ILFCM-20X16
		20	60	ILFCM-20X20
		24	70	ILFCM-20X24
24"	24A 23.95 - 24.10	8	24	ILFCM-24X8
		10	30	ILFCM-24X10
		12	35	ILFCM-24X12
		16	47	ILFCM-24X16
		20	61	ILFCM-24X20
		24	71	ILFCM-24X24

* 6" WIDTH AVAILABLE AT SAME PRICE AS 8"

**PLEASE DENOTE CLAMP RANGE WHEN ORDERING. EXAMPLE: 12BX12 = ILFCM-12X12-B

SPECIAL SIZES AVAILABLE UPON REQUEST



FOR MAXIMUM SEALING POWER TORQUE BOLTS
EQUALLY ON BOTH SIDES OF THE CLAMP

2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

EZ Collar Leak Clamps

COLLAR LEAK CLAMPS



- NON CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- NBR MOLDED STEP GASKETS WITH RAISED-RIB DESIGN
- ASTM A536 DUCTILE IRON LUGS
- WORKING TEMPERATURE RANGE: -40° F TO 150° F
- DESIGNED WITH A MOLDED OFFSET GASKET TO FIT PARTIALLY OVER BOTH THE COUPLING AND PIPE TO EFFECTIVELY SEAL LEAKS

NOMINAL PIPE SIZE (IN)	PIPE OD (IN)	COLLAR OD (IN)	PIPE AND COLLAR TYPE	3" WIDTH ORDER #	6" WIDTH ORDER #
1"	1.32	1.58	Schedule 40 PVC	EZCLC-1X3-PVC	EZCLC-1X6-PVC
1 1/4"	1.66	2.00	Schedule 40 PVC	EZCLC-1.25X3-PVC	EZCLC-1.25X6-PVC
1 1/2"	1.90	2.25	Schedule 40 PVC	EZCLC-1.5X3-PVC	EZCLC-1.5X6-PVC
2"	2.38	2.75	Schedule 40 PVC	EZCLC-2X3-PVC	EZCLC-2X6-PVC
	2.38	2.87	2" API	EZCLC-2X3-API	EZCLC-2X6-API
	2.38	3.06	2" EUE	EZCLC-2X3-EUE	EZCLC-2X6-EUE
2 1/2"	2.87	3.25	Schedule 40 PVC	EZCLC-2.5X3-PVC	EZCLC-2.5X6-PVC
	2.87	3.38	2 1/2" API	EZCLC-2.5X3-API	EZCLC-2.5X6-API
	2.87	3.67	2 1/2" EUE	EZCLC-2.5X3-EUE	EZCLC-2.5X6-EUE
3"	3.5	4.00	Schedule 40 PVC	EZCLC-3X3-PVC	EZCLC-3X6-PVC
			3" API	EZCLC-3X3-API	EZCLC-3X6-API
			3" EUE	EZCLC-3X3-EUE	EZCLC-3X6-EUE
3 1/2"	4.00	4.63	3 1/2" Line Pipe	EZCLC-3.5X3	EZCLC-3.5X6

ORDER BY: Pipe Size, Clamp Width, Coupling Type

Example: 2" X 3" API (EZCLC-2X3-API)

ALL PVC CLAMPS ARE FOR SDR 26 BELL

NOT RECOMMENDED FOR RUBBER RING PUSH ON JOINT PVC PIPE

HOME GROWN

FC Collar Leak Clamps

COLLAR LEAK CLAMPS



- NON-CORROSIVE ASTM A240 STAINLESS STEEL BAND
- CORROSION-RESISTANT ZINC DICHROMATE-PLATED BOLTS, NUTS, & WASHERS
- NBR MOLDED STEP GASKETS WITH RAISED-RIB DESIGN
- ASTM A359 DUCTILE IRON L UGS
- WORKING TEMPERATURE RANGE: -40° F TO 150° F
- DESIGNED WITH A MOLDED OFF-SET GASKET TO FIT PARTIALLY OVER BOTH THE COUPLING AND PIPE TO EFFECTIVELY SEAL LEAKS

NOMINAL PIPE SIZE (IN)	PIPE OD (IN)	COLLAR OD (IN)	PIPE AND COLLAR TYPE	WEIGHT	6" WIDTH ORDER #
3"	3.5	4.00	SCHEDULE 40 PVC	6	FCCLC-3X6-PVC
	3.5	4.00	3" API	6	FCCLC-3X6-API
	3.5	4.50	3" EUE	6	FCCLC-3X6-EUE
3 1/2"	4.00	4.63	3 1/2" API	6	FCCLC-3.5X6-API
4"	4.50	5.00	Schedule 40 PVC	7	FCCLC-4X6-PVC
	4.50	5.00	4 1/2" API Casing	7	FCCLC-4.5X6-APIC
	4.50	5.20	4" API	7	FCCLC-4X6-API
4 1/2"	5.00	5.56	Schedule 40 PVC	7	FCCLC-4.5X6-PVC
5"	5.50	6.05	Schedule 40 PVC	8	FCCLC-5X6-PVC
5 1/2"	6.05	6.50	5 1/2" API Casing	8	FCCLC-5.5X6-APIC
6"	6.63	7.20	Schedule 40 PVC	8	FCCLC-6X6-PVC
	6.63	7.39	6" API	9	FCCLC-6X6-API
7"	7.00	7.65	7" API Casing	8	FCCLC-7X6-APIC
	7.63	8.50	7" API	9	FCCLC-7X6-API
8"	8.63	9.25	Schedule 40 PVC	10	FCCLC-8X6-PVC
	8.63	9.63	8" API	11	FCCLC-8X6-API

ORDER BY: Pipe Size, Clamp Width, Coupling Type

Example: 3" X 6" API (FCCLC-3X6-API)

ALL PVC CLAMPS ARE FOR SDR 26 BELL

NOT RECOMMENDED FOR RUBBER RING PUSH ON JOINT PVC PIPE

NATIONAL LEADERSHIP. OKLAHOMA VALUES.



2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

Sleeve Couplings

PLASTIC COATED STEEL SLEEVE COUPLINGS



- PLASTIC COATING INSIDE AND OUT
- HEAT-TREATED BOLTS FOR GREATER STRENGTH AND DURABILITY
- BUNA-N GASKETS


NOMINAL PIPE SIZE (IN)	SLEEVE LENGTH (IN)	WEIGHT (LBS)	ORDER #
2"	5	7	SCP2X5
	7	8	SCP2X7
	12	11	SCP2X12
	24	18	SCP2X24
2.5"	5	9	SCP2.5X5
	12	14	SCP2.5X12
	24	23	SCP2.5X24
3"	5	10	SCP3X5
	7	12	SCP3X7
	12	17	SCP3X12
	24	27	SCP3X24
4"	5	14	SCP4X5
	7	16	SCP4X7
	12	21	SCP4X12
	24	34	SCP4X24

REPLACEMENT PARTS

PART	ORDER #
2" Replacement Gasket	SC-GASKET-2
2.5" Replacement Gasket	SC-GASKET-2.5
3" Replacement Gasket	SC-GASKET-3
4" Replacement Gasket	SC-GASKET-4
Bolt for 5" Long Coupling	SC-CBNS-5
Bolt for 7" Long Coupling	SC-CBNS-7
Bolt for 12" Long Coupling	SC-CBNS-12
Bolt for 24" Long Coupling	SC-CBNS-24

Galvanized Compression Couplings

GCC

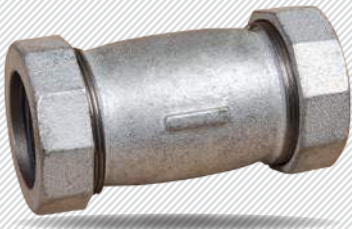

- GALVANIZED STEEL BODY AND CAPS
- MADE TO FIT STANDARD STEEL AND PVC PIPE DDs

NOMINAL PIPE SIZE (IN)	PIPE OD (IN)	WEIGHT (LBS)	ORDER #
1/2"	0.84	1	GCC-1/2
3/4"	1.05	1	GCC-3/4
1"	1.32	1.5	GCC-1
1 1/4"	1.66	2	GCC-1-1/4
1 1/2"	1.90	2.5	GCC-1-1/2
2"	2.38	3.5	GCC-2

OKLAHOMA-BRED



REMCO
MANUFACTURING

2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

Line Check Valves

STAINLESS STEEL FLOW LINE CHECK VALVE



- 6,000 and 10,000 psig maximum working pressure
- 10-30 psig Cracking pressure
- 304 stainless steel body
- Inconel spring
- Available with:
 - Stainless steel or ceramic ball
 - Viton or teflon seat

SIZE	ORDER #
1/8	LCSS-1/8-6000-SSB-V
1/4	LCSS-1/4-6000-SSB-V, LCSS-1/4-6000-SSB-T
1/4	LCSS-1/4-6000-CEB-V, LCSS-1/4-6000-CEB-T
1/4	LCSS-1/4-10000-SSB-V, LCSS-1/4-10000-SSB-T
1/2	LCSS-1/2-6000-SSB-V

BRASS FLOW LINE CHECK VALVE



- 3000 psig maximum working pressure
- 10-30 psig cracking pressure
- 360 brass body
- Inconel spring
- Standard with 316 SS Ball, Viton Seal
- Ceramic Ball, Chrome Ball and Teflon seal also available

SIZE	ORDER #
1/4	LCB-1/4-3000-SSB-V, LCB-1/4-3000-T
1/4	LCB-1/4-3000-CEB-V, LCB-1/4-3000-CEB-T
1/4	LCB-1/4-3000-CHB-T
1/8	LCB-1/8-3000-SSB-V, LCB-1/8-3000-CEB-V, LCB-1/8-3000-CHB-V



2804 W. 40th St
 Tulsa, OK 74107
 t. 800.346.6310
 f. 918.445.7717
www.youngenergyproducts.com

Polished Rod Lubricators

PRL



THE REMCO POLISHED ROD LUBRICATOR is designed with two oil reservoirs that accept a felt wick which allows oil to wick over onto the polished rod. This is most effective when the well pumps off. The oil on the wicks lubricates the polished rod keeping the stuffing box rubbers from burning up and leaking when the well goes "On Pump." This eliminates unsightly and costly messes. Plus, this lubricating factor increases the life of the polished rod and the packing rubbers.

One box fits all polished rods by merely changing the wick size. Reservoir capacity is 1 quart and the shipping weight is 5 lbs.

POLISHED ROD SIZE (IN)	WICK SIZE (IN)	ORDER #
1 1/8" & 1 1/4"	1/2	PRL-1-1/8"-1-1/4"
1 5/16", 1 1/2" & 1 3/8"	3/8	PRL-1-5/16"-1-1/2"
1 3/4"	1/4	PRL-1-3/4"

INTEGRITY

STANDING BY OUR WORD FOR OUR CUSTOMERS

SINCE 1983



2804 W. 40th St
Tulsa OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

Vane Meter Repair Kits

VMRK



THE REMCO 793 VANE METER REPAIR KITS are economical replacement parts for your 793A and 793D Vane Meters. These parts are of top quality design and manufacture and are available for immediate shipment at a substantial savings over original manufacturer's equipment costs.

ORDER #	DESCRIPTION
VMRK-VPSS	Vane Plate Stainless Screw
VMRK-UVP	Upper Vane Plate
VRMK-LVP	Lower Vane Plate
VRMK-RR	Retaining Ring
2-018	O-Ring for Rotor Shaft
VMRK-RS	Rotor Shaft
VMRK-ROTOR	Rotor Assembly (Vane)
VMRK-WP	Stainless Steel Wear Plate
2-239	Main Case O-Ring
VMRK	Vane Meter Repair Kit (Includes all items listed above)



REMCO
MANUFACTURING

2804 W 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

TP-316

TOGGLE BAR TANK PATCH



- REPAIRS HOLES IN VESSELS THAT OPERATE AT ATMOSPHERIC PRESSURE
- PATCHES HOLES UP TO 1 1/2" IN DIAMETER ON FLAT SURFACES OR 26" OR LARGER DIAMETER ON ROUND SURFACES
- EASY TO INSTALL WITH ONLY A 9/16" WRENCH
- ZINC 1-PLATED STEEL FOR LONG LIFE
- NEOPRENE GASKET

ORDER #

WEIGHT (LB)

TP-316

0.5

INSTALLATION INSTRUCTIONS

1. Loosen nut, extend toggle straight out and insert through 1/2" or larger hole in tank.
2. With your screwdriver, turn the bolt a half turn which will allow the toggle bar to turn downward.
3. Turn the bolt another half turn and the toggle will center itself on the pin in the bolt, and center itself over the hole.
4. Hold the bolt to keep it from turning and tighten the hex nut with a wrench. *AVOID OVER TIGHTENING!*

TP-317

TOGGLE WING TANK PATCH



- REPAIRS VESSELS THAT OPERATE AT ATMOSPHERIC PRESSURE
- PATCHES HOLES UP TO 1 1/2" IN DIAMETER ON FLAT SURFACES OR 36" OR LARGER DIAMETER ON ROUND SURFACES
- EASY TO INSTALL WITH ONLY A 9/16" WRENCH SIMPLE, LOW COST, EASY TO INSTALL DESIGN
- ZINC 1-PLATED STEEL FOR LONG LIFE
- NEOPRENE GASKET

ORDER #

WEIGHT (LB)

TP-317

0.5

INSTALLATION INSTRUCTIONS

1. Screw the toggle nut all the way out. Fold the toggle nut back and insert through 15/16" or larger hole until toggle nut flips open
2. Pull out the toggle bolt until the toggle nut contacts wall. Use 9/16" end wrench and screw down until tight. *AVOID OVER TIGHTENING!*

REMCO
MANUFACTURING

2804 W. 40th St
Tulsa, OK 74107
t. 800.346.6310
f. 918.445.7717
www.youngenergyproducts.com

Tapered Screw Leak Repair Plugs

TLP



- ECONOMICAL REPAIR OF HOLES IN BOILERS, RANKS, GUN BARRELS, AND BOTH LARGE- AND SMALL-DIAMETER PIPELINES
- 1018 STEEL AND HEAT-TREATED FOR LONG LIFE
- INSERT AND TIGHTEN FOR SIMPLE INSTALLATION
- LONG TAPER MAKE THE PLUGS SELF-TAPPING
- MAY BE WELDED AFTER INSERTION FOR PERMANENCY

PLUG SIZE (IN)	ORDER #
3/8"	TLP-3/8
5/8"	TLP-5/8
7/8"	TLP-7/8

Tile Probes

TILEPR



- HELPS LOCATE BURIED PIPE TO ELIMINATE UNNECESSARY DIGGING
- REPLACEABLE, HARDENED STEEL TIP
- VINYL GRIP COVERS ARE NOT INTENDED FOR ELECTRICAL INSULATION PURPOSES; PROPER NON-CONDUCTIVE GLOVES SHOULD ALWAYS BE WORN
- *USE WITH CAUTION IF BURIED ELECTRIC LINES MAY BE PRESENT!!!*

PROBE LENGTH (FT)	ORDER #
4'	TILEPR-4
5'	TILEPR-5
6'	TILEPR-6
	VINYHANDLEGrips
	REPLACEMENT TIP



2804 W 40th St
 Tulsa, OK 74107
 t. 800.346.6310
 f. 918.445.7717
www.youngenergyproducts.com

TERMS AND WARRANTY

PRICES

All pricing and design standards are subject to change without notice. Customer orders are accepted with the understanding that prices in effect at the time of shipment will be invoiced to the customer and may, from time to time, vary from stated book prices. Prices quoted therein do not include federal, state or municipal sales or use, occupation or privilege taxes, based on or measured by sales; which tax or taxes will be added to prices where applicable.

DELIVERY

Shipment made from our factory, or from any company warehouse, will be made to the best of our efforts within the time-frame designated. We cannot be held responsible for delays in shipments caused by strikes, material conditions or delays beyond our control. All deliveries quoted for stock items are subject to prior sale.

CANCELLATION

Customer orders which have been accepted, scheduled, and ready for shipment, or any of the three, if canceled, are subject to reimbursement for costs incurred pursuant to the filling of the order

FREIGHT

The buyer assumes responsibility for freight damages, delays, or loss of shipment. (Freight will be prepaid in the continental U.S.A. on single destination orders in excess of \$1000 net.)

RETURNS

Any item of our manufacture may not be returned or exchanged unless written authorization is obtained from the Offices at Tulsa, OK. Any returned items will carry a minimum restocking charge of 15%, with freight paid to the factory by the customer.

TERMS OF PAYMENT

Net 30, with 1.5% interest per month charged on all past bills.

WARRANTY

REMCO MANUFACTURING's products are warrantied against failures by reason of defective workmanship or material within one year of the date of sale when the product is properly installed and operated, and subject to the following conditions and limitations. Our warranty is that we will repair or replace, at Remco Manufacturing's option, free of charge, any valve failing because of the stated defects within the time limit, providing that it is returned to our plant. The warranty does not extend to claims for labor expense, or other loss or damage occasioned by the failure. We do not warranty against deterioration by corrosion or any cause or failure other than a defect of material of workmanship in manufacture, nor do we guarantee a minimum length of service.

The warranty stated above is the sole warranty of the seller, any and every other warranty or guarantee of any kind, whether formally expressed or in any way implied, is nullified and excluded from the terms of sale. Purchasers are advised that the foregoing is the sole warranty offered by or acceptable to Remco Manufacturing, and that no other agent or employee of the company is authorized to contract for the sale of its product upon any other terms.

PIPE OD CHART

STEEL & PVC		CAST IRON				ASBESTOS CEMENT																										
Nom Pipe Size (in)	Pipe OD (in)	Nom Pipe Size (in)	Class of Pipe		Pipe OD (in)	RING-TITE (J & M)																										
			AWWA Pit Cast	CENTRIFUGAL		CLASS 100		CLASS 150		CLASS 200																						
						Mach End 1st Step (in)	Rough Barrel OD (in)	Mach End 1st Step (in)	Rough Barrel OD (in)	Mach End 1st Step (in)	Rough Barrel OD (in)																					
1/2	0.84	2 2 1/4			2.50	3	3.74	4.00	3.84	4.10	3.84	4.23																				
1/4	1.05												3	A B,C,D	150 - 250	3.80	4.64	4.90	4.81	5.07	4.81	5.34										
1	1.32																						4	A B,C,D	150 - 250	3.96	6.91	7.17	6.91	7.19	6.91	7.32
1 1/4	1.66																															
2	2.38	6	A B,C,D	150 - 250	4.80	11.24	11.50	11.66	11.92	11.66	11.95																					
2 1/2	2.88											6	A B,C,D	150 - 250	7.10	13.44	13.79	13.92	14.18	13.92	14.18											
3 OD	3.00																					8	A,B C,D	150 - 250	9.05	15.07	15.51	16.22	15.46	16.22	16.59	
3	3.50																															8
3 1/2	4.00	10	A,B C,D	150 - 250	11.10	11.40	11.10	11.40	11.10	11.40																						
4 OD	4.00										12	A,B C,D	150 - 250	13.20	13.50	13.20	13.50	13.20	13.50													
4	4.50																			14	A,B C,D	100	15.30	15.65	15.30	15.65	15.30	15.65				
4 1/2	5.00																												14	A,B C,D	150 - 250	17.40
5	5.56	16	A,B C,D	100	19.50	19.92	19.50	19.92	19.50	19.92																						
6 OD	6.00										16	A,B C,D	150 - 250	21.60	22.06	21.60	22.06	21.60	22.06													
6 RIV	6.25																			18	A,B C,D	100	25.80	26.32	25.80	26.32	25.80	26.32				
6	6.63																												18	A,B C,D	150 - 250	19.92
7 RIV	7.25	20	A,B C,D	100	22.06	22.52	22.06	22.52	22.06	22.52																						
7	7.63										20	A,B C,D	150 - 250	26.32	26.78	26.32	26.78	26.32	26.78													
8 OD	8.00																			24	A,B C,D	100	28.50	28.96	28.50	28.96	28.50	28.96				
8 RIV	8.25																												24	A,B C,D	150 - 250	32.70
8	8.63	24	A,B C,D	150 - 250	36.90	37.36	36.90	37.36	36.90	37.36																						
9	9.63										24	A,B C,D	150 - 250	41.10	41.56	41.10	41.56	41.10	41.56													
10 OD	10.00																			24	A,B C,D	150 - 250	45.30	45.76	45.30	45.76	45.30	45.76				
10 RIV	10.25																												24	A,B C,D	150 - 250	49.50
10	10.75	24	A,B C,D	150 - 250	53.70	54.16	53.70	54.16	53.70	54.16																						
12 OD	12.00										24	A,B C,D	150 - 250	57.90	58.36	57.90	58.36	57.90	58.36													
12 RIV	12.25																			24	A,B C,D	150 - 250	62.10	62.56	62.10	62.56	62.10	62.56				
12	12.75																												24	A,B C,D	150 - 250	66.30
PLASTIC IRRIGATION PIPE (PIP)																																
Nom Pipe Size (in)	Pipe OD (in)	50 HEAD	80 PSI	100 PSI																												
		PIPE ID (in)	PIPE ID (in)	PIPE ID (in)	PIPE ID (in)																											
4	4.13			3.92																												
6	6.14	6.00	5.90	5.84	5.84																											
8	8.16	8.00	7.84	7.76	7.76																											
10	10.20	10.00	9.80	9.70	9.70																											
ASBESTOS - CEMENT IRRIGATION PIPE																																
Nom Pipe Size (in)	TYPE 5		TYPE 15		TYPE 25																											
	Mach End	OD	Mach End	OD	Mach End	OD																										
2	3.66	3.70	3.66	3.81	3.84	4.00																										
4	4.70	4.74	4.70	4.86	4.81	4.97																										
5	5.68	5.72	5.68	5.84																												
6	6.66	6.70	6.66	6.81	6.91	7.10																										
8	8.80	9.02	8.80	9.04	9.11	9.27																										
10	10.89	11.12	10.89	11.16	10.89	11.31																										
12	12.99	13.22	12.99	13.26	13.44	13.74																										
PVC SEWER PIPE																																
Nom Pipe Size (in)		S.D.R.		Average OD (in)																												
4		33.5		4.215																												
6		35		6.275																												
8		42 & 35		8.400																												
10		42 & 35		10.500																												

REMMCO

MANUFACTURING

